Analog DECT Phone



AMT-9210-SM / AMT-9110-SM AMT-9210-SM-7979 / AMT-9110-SM-7979 ASP-9210-SM / ASP-9110-SM ASP-9210-SM-7979 / ASP-9110-SM-7979

> QIG V 1.00

1 Over view

This phone is a full-feature telephone that provides voice communication. Read this QIG carefully to learn how to operate this product and take advantage of its features.

Package Contents

When unpacking the phone, ensure all the following items are present and undamaged. If anything appears to be missing or broken, contact your dealer for a replacement.

- 1. Base Unit
- 2. Handset
- 3. Stand
- 4. AC Adaptor
- 5. RJ-45 Cable
- 6. Quick Installation Guide (This document)

2 Product Description

The following contains important information to help you familiarize with the functions of the VoIP phone.

Front View




1. Base unit keys

	Name	Description
1	Message waiting indicator	To indicate an incoming call or unread messages.
2	Speed dial keys	Press to dial the preset number.
3	Alphanumerical keys	Press these keys to enter phone numbers and texts.
4	Function keys	
	HOLD	Press to put an active call on hold.
	REDIAL	Press to call the last number dialed.

Name	Description
CONF	Press to activate the three-way conference call.
MUTE	Press to mute a call.
SPEAKER	Press to activate the speakerphone for hands free conversations.
MESSAGE	Press to retrieve voice messages.
VOLUME	Press to increase or decrease the volume of the ringer tone or speakerphone.
LINE 1 / LINE 2	To indicate a line been used as the following status: - Idle: No LED indication Pre-dialing a call: Green LED In call: Red LED In on-hold call: Blinking red LED.


Back View




NO.	Name	Description
1	DC 6V Power jack	Connects to AC power adapter.
2	PSTN line port	Connects to PSTN line.

Connecting the Phone

The following illustration shows how to connect the power

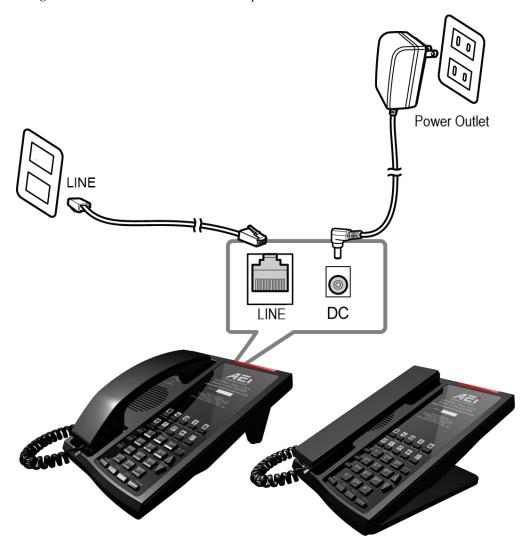

The following illustration shows how to install the phone and stand.

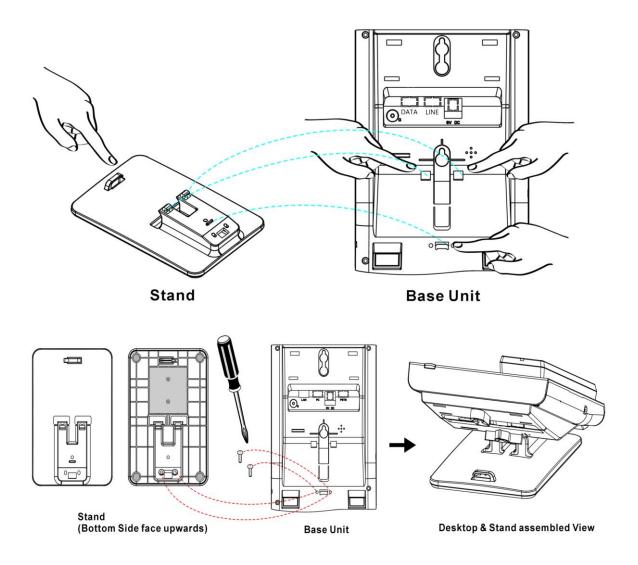

3 Operation

Answering a Call

An incoming call is indicated by a ringing tone and a flashing indicator. You can answer the call by doing one of the followings:

- Pick up the **handset** to answer the call.
- Press the Line (Line1/Line2)/Speaker key to answer the call.

Making a Call

Dialing with the Keypad

- Enter the telephone number with the alphanumerical keypad.
- After entering the number you want to call, press the # key to force dialing or wait for 4 seconds before the number is dialed automatically.

Using the Speed dial keys

You can use the 10 pre-assigned speed dial hotkeys, to configure the most commonly dialed numbers. Use the function to dial a number quickly, instead of keying in a complete number.

To call a number using speed dialing, follow the steps below:

• Press the speed dial hotkey that has been pre-assigned to the phone number and the call will start automatically.

Call Options

While a call is in progress, a number of additional options are available.

Using the Speaker Phone

For hands free operation, you can use the built-in speaker to talk on the phone. To use the speakerphone, follow the steps below:

- While talking on the phone, press the **SPEAKER** key on the phone to enable the Speakerphone function.
- Press SPEAKER key again to terminate the call.

Putting a Call on Hold

You may want to put a call on hold temporarily while doing some work or attending to a second incoming or outgoing call. To put a call on hold, do one of the following:

- Press the **HOLD** key on the phone to put the call on hold.
- When you receive a second call, press the next available LINE key to attend to the new call, and the first call will be put on hold automatically.

Checking Voice Messages

If the **message waiting indicator** at top of handset or base unit lights up in red, it indicates that there are one or more new messages in voicemail box.

Press the MESSAGE key on the phone to retrieve voice messages.

4 Support

For technological support, please email to support@aeicommunication.com.